



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C11D 3/00, 3/37, 3/12, 11/00, 17/00, 3/20, 17/06	A1	(11) International Publication Number: WO 00/02984 (43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/EP99/04735 (22) International Filing Date: 5 July 1999 (05.07.99) (30) Priority Data: 9814822.4 8 July 1998 (08.07.98) GB (71) Applicant (for AE AU BB CA CY GB GD GH GM IE IL KE LC LK LS MN MW NZ SD SG SL SZ TT UG ZA ZW only): UNILEVER PLC [GB/GB]; Unilever House, Blackfriars, London EC4P 4BQ (GB). (71) Applicant (for all designated States except AE AU BB CA CY GB GD GH GM IE IL KE LC LK LS MN MW NZ SD SG SL SZ TT UG ZA ZW): UNILEVER NV [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL). (72) Inventors: EMERY, William, Derek; Unilever Research Port Sunlight, Quarry Road East, Bebington, Wirral, Merseyside, L63 3JW (GB). JONES, Neil; Unilever Research Port Sunlight, Quarry Road East, Bebington, Wirral, Merseyside, L63 3JW (GB). DE RUIJTER, Hendrik; Rozenlaan 102, NL-3135 XT Vlaardingen (NL). STRUIJBOSCH, Antonius, Henricus, J.; Unilever Research Vlaardingen, Olivier van Noortlaan 120, NL-3133 AT Vlaardingen (NL).		(74) Agent: FRANELLA, Mary, Evelyn; Unilever PLC, Patent Dept., Colworth House, Sharnbrook, Bedford MK44 1LQ (GB). (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: DYE-TRANSFER-INHIBITING COMPOSITIONS AND PARTICULATE DETERGENT COMPOSITIONS CONTAINING THEM (57) Abstract <p>A free-flowing granular polymer composition suitable for incorporation into a particulate detergent composition comprises a defined dye-transfer-inhibiting polymer, preferably poly (4-vinylpyridine) sodium carboxymethyl betaine chloride, and a silica-based carrier material. A preferred carrier material is an acidic silica. The silica-based carrier material may optionally comprise a solid acid, for example, polyacrylic acid or phthalic acid.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DYE-TRANSFER-INHIBITING COMPOSITIONS AND
PARTICULATE DETERGENT COMPOSITIONS CONTAINING THEM

5

TECHNICAL FIELD

The present invention is concerned with granular compositions containing a dye-transfer-inhibiting polymer,
10 for use in particulate detergent compositions.

BACKGROUND AND PRIOR ART

15 The use of various polymers as dye transfer inhibitors (DTIs) in laundry detergent compositions and rinse conditioners has been described in the prior art. Examples of well-known polymers include polyvinyl pyrrolidone (PVP), and copolymers of N-vinylpyrrolidone and N-vinylimidazole
20 (PVP/PVI), available commercially from BASF, Ludwigshafen, Germany as Sokalan (Trade Mark) HP50 and HP56 respectively.

The polymers may be incorporated into particulate detergent compositions directly, for example, as a solution or
25 dispersion, or by dry-mixing powdered polymer with other particulate components. However, the dry-mixing method can lead to deterioration of powder properties, for example, loss of flow and caking, resulting in poor product dispensing into the wash. Powdered polymers can also be
30 difficult to handle.

- 2 -

Alternatively, the polymer may be premixed or granulated with an inert carrier material or another detergent ingredient before incorporation into the detergent composition.

5

EP 677 580A (Procter & Gamble) discloses a free-flowing powder of high bulk density which contains 5 to 50% by weight of a PVP/PVI polymer and 20 to 95% by weight of a detergent ingredient selected from aluminosilicate, citrate, silica, carbonate, bicarbonate, silicate, sulphate, phosphate, and water-soluble polymers. The preferred and exemplified detergent ingredient is zeolite 4A.

The present invention is concerned with a granular polymer composition containing a different, novel and highly effective dye-transfer-inhibiting polymer. The novel polymer, supplied as an aqueous solution, displays a tendency to discolour on storage; and if spray-dried gives very hygroscopic granules. The granular polymer composition of the invention simultaneously solves the discolouration problem and provides a convenient method for incorporating the polymer into a particulate detergent composition without handling difficulties and without having a detrimental effect on powder properties.


25

- 3 -

DEFINITION OF THE INVENTION

The present invention accordingly provides a free-flowing granular polymer composition suitable for incorporation in a particulate detergent composition, the granular polymer composition comprising:

(a) a dye-transfer-inhibiting polymer having the general formula I:

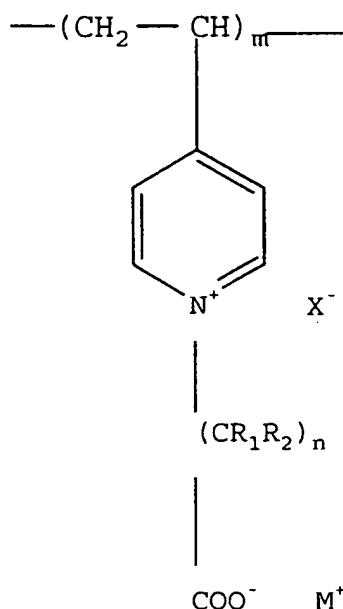

wherein m indicates the degree of polymerisation,
 X is an anion,
 R_1 and R_2 are independently hydrogen, alkyl or aryl,
 n is an integer within the range of from 1 to 5,
and M is a cation;

(b) a carrier material comprising a silica.

- 4 -

The dye-transfer-inhibiting polymer

The dye transfer inhibiting (DTI) polymers with which this invention is concerned are water-soluble poly(vinylpyridine
5 betaines) containing a quaternary nitrogen and a carboxylate group. These polymers exhibit particularly effective DTI properties even in the presence of anionic surfactants.

The polymers have the general formula I given above.

10

Preferred polymers are those in which:

X is a halide, most preferably Cl or Br;

R₁ and R₂ are both hydrogen;

n is 1,

15


M is alkali metal, most preferably Na or K;

and the polymer is 25-100% quaternised, preferably 75-100% quaternised.

Preferred polymers have a weight average molecular weight of
20 about 5000 to 1 000 000, preferably 20 000 to 200 000;
where m is about 30 to 5000, preferably 100 to 1000.

An especially preferred polymer is
poly(4-vinylpyridine) sodium carboxymethyl betaine chloride,
25 having the formula II below, which is arrived at from
formula I when $n = 1$, R₁ and R₂ are both hydrogen, X = Cl and
M = Na.

Specifically, samples of polymer having degrees of
30 quaternisation of 100%, 75% and 50% have been found to have
a high level of DTI effectiveness.

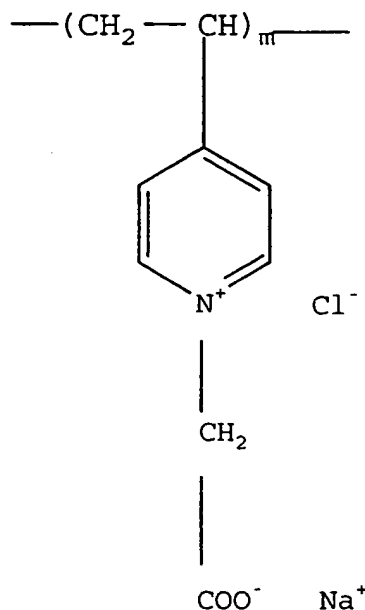Formula II

5

Also of interest are copolymers in which the 4-vinylpyridine (VPy) monomer is partially replaced by other polymerisable dye-binding monomers. Preferred dye-binding comonomers are nitrogen-containing heterocycles.

Preferred comonomers include vinyl pyrrolidone (VP), vinyl imidazole (VI), acrylamide, vinyl caprolactam, vinyl azlactone, vinyl azlactam, methyl vinyl imidazole (MeVI), vinyl pyridine-N-oxide (VPy-N-O), vinyl oxazolidone.

Especially preferred comonomers are vinyl pyrrolidone (VP) and vinyl imidazole (VI).

20

Examples of such polymers include:

- 6 -

- a copolymer in which the 4-vinyl pyridine (VPy) monomer is partially replaced by vinyl pyrrolidone (VP) at a ratio of VPy to VP of 50:50, 100% quaternised;

- 5 - a copolymer in which the 4-vinyl pyridine (VPy) monomer is partially replaced by vinyl pyrrolidone (VP) at a ratio of VPy to VP of 25:75, 100% quaternised.

In addition to or instead of dye-binding comonomers, other
10 comonomers, for example, acrylic-type monomers, may be included, in order to confer additional water solubility or to provide other benefits.

As previously indicated, it has been found that these highly
15 effective DTI polymers, supplied in aqueous solution form, can show a tendency to become discoloured if stored in an alkaline environment, such as obtains in a laundry detergent composition. Furthermore, if the polymer solution is spray-dried, very hygroscopic granules result. The polymers
20 cannot, therefore, readily be incorporated as such into a particulate laundry detergent composition.

The present invention solves both these problems simultaneously by providing a composition in granular form
25 in which the polymer is present together with a silica-based carrier material.

The silica-based carrier material

30

The carrier material is based on a silica. It has been found that certain silicas are effective to give light-coloured granules of high storage stability, while others

- 7 -

are less effective. Without wishing to be bound by theory, it is believed that the silicas that are most effective are acidic, or have a low iron content, or both.

- 5 The silica on which the carrier material is based preferably has a 5% solution pH not exceeding 6.0, more preferably not exceeding 5.0. Preferably the silica has a 5% solution pH within the range of from 2.0 to 8.0, more preferably from 2.0 to 6.0 and most preferably from 3.0 to 5.0.

10

Alternatively or additionally, the silica may preferably have an iron content (maximum) of less than 200 ppm, more preferably less than 150 ppm. Preferably the iron content (as Fe) is from 50 to 200 ppm, more preferably from 50 to

15 150 ppm.

The contents of other transition metals, for example, titanium, chromium and manganese, may also play a significant role.

20

5% solution pH values and iron contents for some commercially available silicas are shown below (* denotes Trade Mark). Most other Crosfield commercial silicas have pH values within the 6.0 to 7.0 range.

25

Values for a commercially available finely divided aluminosilicate, Alusil* ET, are also shown.

- 8 -

	Manufacturer	pH (5% solution)	Fe content (ppm, max)
Gasil* 200TP	Crosfield	3.2-5.0, average 4.5	140
Gasil* AB720	Crosfield	5.5-7.5	80
Sorbosil* TC15	Crosfield	5.5-7.5, average 6.3	420
Sipernat* 50	Degussa	5.0-7.0	230
Alusil* ET	Crosfield	11.0	415

Both precipitated and gelled silicas may be suitable for use
5 as carrier materials in the polymer granules of the present
invention.

The most preferred silicas for use in the present invention
are Gasil* 200TP and Gasil* AB720.

10

These silicas may be used alone as carrier materials for DTI
polymers in granules according to the present invention.

Advantageously, the silica-based carrier material may also
15 comprise a solid organic or inorganic acid. If a solid acid
is present, a silica material that does not intrinsically
have a low pH may be used. Thus the use of a solid acid
enables silicas that are not effective alone, for example,
Sorbosil* TC15, to be used as carriers in the granular
20 polymer compositions of the present invention.

Solid organic acids are preferred. The acid may be monomeric or polymeric. Examples of solid organic acids include:

- 5 - aliphatic dicarboxylic acids, for example, adipic acid;
- aromatic dicarboxylic acids, for example, phthalic acid;
- 10 - polymeric polycarboxylic acids, for example, polyacrylic acid.

An especially preferred carrier material of this type is a Gasil* silica in conjunction with polyacrylic acid.

Advantageously, the solid organic acid forms a coating or partial coating on the granules.

Examples of solid inorganic acids include boric acid, sodium
20 hydrogen sulphate, disodium hydrogen orthophosphate.

The granular polymer composition of the invention may suitably contain the following percentages of the various ingredients:

25	DTI polymer	5 to 50, preferably 10 to 30
	Silica	20 to 95, preferably 30 to 90
30	Polymeric acid or Monomeric acid	0 to 15, preferably 2 to 10 0 to 60, preferably 20 to 50

- 10 -

If desired, the granular polymer composition may also contain titanium dioxide in order further to increase whiteness.

5

Preparation of the granular polymer composition

The DTI polymer is supplied as an aqueous solution. The granular polymer composition may be prepared by mixing and
10 granulating the DTI polymer solution and the silica, plus the solid acid if applicable, in a suitable mixer or granulator which provides shear. Suitable mixers are high speed mixer/granulators such as the Fukae* batch high speed mixer/granulators and the Lödige* continuous high speed
15 mixer/granulators.

The resulting granules may optionally be dried using fluid bed drying at low air inlet temperatures.

20 When a solid organic acid is used, it may be especially advantageous to carry out a two stage process in which the silica and polymer are initially granulated together, and then the resulting granules mixed separately with the solid organic acid, so that the solid organic acid forms a coating
25 or partial coating on the granules. This process is especially effective if the solid organic acid is a polymeric acid such as polyacrylic acid.

It is believed that a full coating or even encapsulation
30 might be especially beneficial.

- 11 -

Titanium dioxide, if used, may be incorporated during the granulation, or subsequently applied or "layered" onto the finished granules as a coating or outer layer.

5

Detergent compositions

The granular polymer compositions described above may be incorporated in particulate laundry detergent compositions, suitably in an amount equivalent to a content of the DTI polymer itself of from 0.01 to 10 wt%, preferably from 0.02 to 5 wt%, more preferably from 0.03 to 2 wt%.

The term "particulate laundry detergent composition" used in this specification includes powders or granular products of any bulk density, and also tablets of compacted powder.

A particulate laundry detergent composition in accordance with the present invention may suitably comprise:

20

(a) from 5 to 60 wt% of one or more organic detergent surfactants,

(b) optionally from 0 to 80 wt% of detergency builder,

25

(c) optionally other detergent ingredients,

(d) a granular polymer composition as defined above, in an amount equivalent to a content of the polymer itself of from 0.01 to 10 wt%, preferably from 0.02 to 5 wt%, more preferably from 0.03 to 2 wt%.

30

- 12 -

The detergent compositions will contain, as essential ingredients, one or more detergent active compounds (surfactants) which may be chosen from soap and non-soap anionic, cationic, nonionic, amphoteric and zwitterionic detergent active compounds, and mixtures thereof.

Many suitable detergent active compounds are available and are fully described in the literature, for example, in "Surface-Active Agents and Detergents", Volumes I and II, by Schwartz, Perry and Berch.

The preferred detergent active compounds that can be used are soaps and synthetic non-soap anionic and nonionic compounds.

Anionic surfactants are well-known to those skilled in the art. Examples include alkylbenzene sulphonates, particularly linear alkylbenzene sulphonates having an alkyl chain length of C₈-C₁₅; primary and secondary alkylsulphates, particularly C₈-C₁₅ primary alkyl sulphates; alkyl ether sulphates; olefin sulphonates; alkyl xylene sulphonates; dialkyl sulphosuccinates; and fatty acid ester sulphonates. Sodium salts are generally preferred.

Nonionic surfactants that may be used include the primary and secondary alcohol ethoxylates, especially the C₈-C₂₀ aliphatic alcohols ethoxylated with an average of from 1 to 20 moles of ethylene oxide per mole of alcohol, and more especially the C₁₀-C₁₅ primary and secondary aliphatic alcohols ethoxylated with an average of from 1 to 10 moles of ethylene oxide per mole of alcohol. Non-ethoxylated nonionic surfactants include alkylpolyglycosides, glycerol monoethers, and polyhydroxyamides (glucamide).

- 13 -

Cationic surfactants that may be used include quaternary ammonium salts of the general formula $R_1R_2R_3R_4N^+ X^-$ wherein the R groups are long or short hydrocarbyl chains, typically alkyl, hydroxyalkyl or ethoxylated alkyl groups, and X is a solubilising anion (for example, compounds in which R_1 is a C_8 - C_{22} alkyl group, preferably a C_8 - C_{10} or C_{12} - C_{14} alkyl group, R_2 is a methyl group, and R_3 and R_4 , which may be the same or different, are methyl or hydroxyethyl groups); and cationic esters (for example, choline esters).

10

The total quantity of detergent surfactant in the composition is suitably from 5 to 60 wt%.

Preferably, the quantity of anionic surfactant is in the range of from 5 to 50% by weight of the total composition. More preferably, the quantity of anionic surfactant is in the range of from 8 to 35% by weight.

The new DTI polymers have proved more effective than previously known polymers in detergent compositions containing anionic surfactants.


Preferably, the quantity of nonionic surfactant is in the range of from 2 to 25% by weight, more preferably from 5 to 20% by weight.

The compositions may also contain a detergency builder, although unbuilt compositions are also within the scope of the invention. The compositions may suitably contain from 10 to 80%, preferably from 15 to 70% by weight, of detergency builder. Preferably, the quantity of builder is in the range of from 15 to 50% by weight.

- 14 -

The detergent composition may contain as builder a crystalline aluminosilicate, preferably an alkali metal aluminosilicate, more preferably a sodium aluminosilicate.

- 5 The aluminosilicate may generally be incorporated in amounts of from 10 to 70% by weight (anhydrous basis), preferably from 25 to 50%. Aluminosilicates are materials having the general formula:



where M is a monovalent cation, preferably sodium. These materials contain some bound water and are required to have a calcium ion exchange capacity of at least 50 mg CaO/g.

- 15 The preferred sodium aluminosilicates contain 1.5-3.5 SiO_2 units in the formula above. They can be prepared readily by reaction between sodium silicate and sodium aluminate, as amply described in the literature.

- 20 The zeolite used as a builder may be the commercially available zeolite A (zeolite 4A) now widely used in laundry detergent powders. Alternatively, the zeolite may be maximum aluminium zeolite P (zeolite MAP) as described and claimed in EP 384 070B (Unilever), and commercially available as
- 25 Doucil (Trade Mark) A24 from Crosfield Chemicals Ltd, UK. Zeolite MAP is defined as an alkali metal aluminosilicate of zeolite P type having a silicon to aluminium ratio not exceeding 1.33, preferably within the range of from 0.90 to 1.33, preferably within the range of from 0.90 to 1.20.
- 30 especially preferred is zeolite MAP having a silicon to aluminium ratio not exceeding 1.07, more preferably about 1.00. the calcium binding capacity of zeolite MAP is generally at least 150 mg CaO per g of anhydrous material.

- 15 -

The particle size of the zeolite is not critical. Zeolite A or zeolite MAP of any suitable particle size may be used.

As well as the crystalline aluminosilicate builders already
5 mentioned, other inorganic or organic builders may be present. Inorganic builders that may be present include sodium carbonate, layered silicate, amorphous aluminosilicates, and phosphate builders, for example, sodium orthophosphate, pyrophosphate and tripolyphosphate.
10 Organic builders that may additionally be present include polycarboxylate polymers such as polyacrylates and acrylic/maleic copolymers; polyaspartates; monomeric polycarboxylates such as citrates, gluconates, oxydisuccinates, glycerol mono-di- and trisuccinates,
15 carboxymethyloxysuccinates, carboxy-methyloxymalonates, dipicolinates, hydroxyethyliminodiacetates, alkyl- and alkylenylmalonates and succinates; and sulphonated fatty acid salts.

20 Especially preferred organic builders are citrates, suitably used in amounts of from 5 to 30 wt %, preferably from 10 to 25 wt %; and acrylic polymers, more especially acrylic/maleic copolymers, suitably used in amounts of from 0.5 to 15 wt %, preferably from 1 to 10 wt %.

25 Builders, both inorganic and organic, are preferably present in alkali metal salt, especially sodium salt, form.

The detergent composition may contain crystalline or
30 amorphous water-soluble alkali metal silicate, preferably sodium silicate having a $\text{SiO}_2:\text{Na}_2\text{O}$ mole ratio within the range of from 1.6:1 to 4:1, 2:1 to 3.3:1.

- 16 -

The water-soluble silicate may be present in an amount of from 1 to 20 wt %, preferably 3 to 15 wt % and more preferably 5 to 10 wt %, based on the total composition.

- 5 The detergent compositions may also suitably contain a bleach system. The compositions may contain peroxy bleach compounds capable of yielding hydrogen peroxide in aqueous solution, for example inorganic or organic peroxyacids, and inorganic persalts such as the alkali metal perborates,
10 percarbonates, perphosphates, persilicates and persulphates.

The sodium percarbonate may have a protective coating against destabilisation by moisture. Sodium percarbonate having a protective coating comprising sodium metaborate and
15 sodium silicate is disclosed in GB 2 123 044 (Kao).
The peroxy bleach compound, for example sodium percarbonate, is suitably present in an amount of from 5 to 35 wt %, preferably from 10 to 25 wt %.

- 20 The peroxy bleach compound, for example sodium percarbonate, may be used in conjunction with a bleach activator (bleach precursor) to improve bleaching action at low wash temperatures. The bleach precursor is suitably present in an amount of from 1 to 8 wt %, preferably from 2 to 5 wt %.

25 Preferred bleach precursors are peroxycarboxylic acid precursors, more especially peracetic acid precursors, pernonanoic acid precursors and peroxybenzoic acid precursors.

30 Especially preferred bleach precursors are N,N,N',N'-tetracetyl ethylenediamine (TAED) and sodium noanoyloxybenzene sulphonate (SNOBS). The novel quaternary

- 17 -

ammonium and phosphonium bleach precursors disclosed in
US 4 751 015 and US 4 818 426 (Lever Brothers Company) and
EP 402 971A (Unilever), and the cationic bleach precursors
disclosed in EP 284 292A and EP 303 520A (Kao) are also of
5 interest.

The bleach system can be either supplemented with or replaced
by a peroxyacid. Examples of such peracids can be found in
US 4 686 063 and US 5 397 501 (Unilever). A preferred
10 example is the imidoperoxy-carboxylic class of peracids
described in EP 325 288A, EP 349 940A, DE 3 823 172A and
EP 325 289A. A particularly preferred example is phthalimido
peroxy caproic acid (PAP). Such peracids are suitably present
at levels of from 0.1 to 12%, preferably from 0.5 to 10%.

15 A bleach stabiliser (heavy metal sequestrant) may also be
present. Suitable bleach stabilisers include ethylenediamine
tetraacetate (EDTA), the aminopolyphosphonates such as
Dequest (Trade Mark), for example, ethylenediamine
20 tetramethylene phosphonate (EDTMP) and diethylenetriamine
pentamethylene phosphonate (DETPMP), and non-phosphate
stabilisers such as EDDS (ethylene diamine disuccinate).
These bleach stabilisers are also useful for stain removal
especially in products containing low levels of bleaching
25 species or no bleaching species.

The compositions may also contain soil release polymers, for
example sulphonated and unsulphonated PET/POET polymers,
both end-capped and non-end-capped, and polyethylene
30 glycol/polyvinyl alcohol graft copolymers such as Sokolan
(Trade Mark) HP22.

- 18 -

The detergent compositions may also contain one or more enzymes. Suitable enzymes include the proteases, amylases, cellulases, oxidases, peroxidases and lipases usable for incorporation in detergent compositions.

5

Preferred proteolytic enzymes (proteases) are catalytically active protein materials which degrade or alter protein types of stains when present as in fabric stains in a hydrolysis reaction. They may be of any suitable origin, such as vegetable, animal, bacterial or yeast origin.

10

Proteolytic enzymes or proteases of various qualities and origins and having activity in various pH ranges of from 4-12 are available. Proteases of both high and low isoelectric point are suitable.

15

Other enzymes that may suitably be present include lipases, amylases, and cellulases including high-activity cellulases such as *Carezyme.

20

Detergency enzymes are commonly employed in granular form in amounts of from about 0.1 to about 3.0 wt%. However, any suitable physical form of enzyme may be used.

25 The compositions may advantageously contain a powder structurant, for example, a fatty acid (or fatty acid soap), a sugar, an acrylate or acrylate/maleate polymer. A preferred powder structurant is fatty acid soap, suitably present in an amount of from 1 to 5 wt %.

30

Sodium carbonate may advantageously be present. This has the advantage that it provides powder structuring, acts to control the pH of the detergent composition when dissolved

- 19 -

and acts as a builder. Preferably 5 to 30% by weight of sodium carbonate are present. Minor ingredients such as layering agents (for example zeolite, *Alusil or clay) may be present, for example, at a level of from 0.1 to 10%.

5

Other materials that may be present in detergent compositions according to the invention include antiredeposition agents such as cellulosic polymers; fluorescers; photobleaches; inorganic salts such as sodium
10 sulphate; foam control agents or foam boosters as appropriate; dyes; coloured speckles; perfumes; and fabric conditioning compounds.

The compositions may be of any bulk density and may be
15 prepared by spray-drying, non-tower granulation or any combination of these techniques. Tablets may be prepared from such powders by any suitable tableting technique.

The detergent compositions when diluted in the wash liquor
20 (during a typical wash cycle) will typically give a pH of the wash liquor from 6 to 11, more typically from 7 to 10.5.

The DTI polymers with which the present invention is concerned are especially suitable for incorporation in
25 laundry detergent compositions intended for washing delicate fabrics, and specifically non-bleaching compositions generating a wash liquor of low pH. The 1 wt% solution pH at 25°C in demineralised water of such compositions generally does not exceed 10.5, preferably does not exceed 10, and
30 more preferably lies within the range of from 9.5 to 10. Even lower pH values, below 9.5, may also be contemplated.

- 20 -

Such compositions may advantageously also possess one or more of the following characteristics:

- absence, or an extremely low level, of fluorescer;
 - 5 - presence of a polycarboxylate polymer, for example, an acrylic/maleic copolymer such as Sokalan (Trade Mark) CP5 ex BASF;
 - 10 - presence of a heavy metal sequestrant, for example, aminomethylenephosphonic acids and salts such as ethylenediamine tetramethylene phosphonate (EDTMP) and its salts, and diethylenetriamine pentamethylene phosphonate (DETPMP) and its salts;
 - 15 - presence of at least two different enzymes.
- However, as indicated previously, the scope for use of the DTI polymers is not restricted to compositions of this type but extends over the whole range of heavy and light duty
- 20 laundry compositions.

- 21 -

EXAMPLES

5 The invention will now be illustrated in more detail by the following non-limiting Examples, in which parts and percentages are by weight unless otherwise stated.

The Examples identified by numbers illustrate the invention,
10 while those identified by letters are comparative.

In all examples, the DTI polymer used was
poly(4-vinylpyridine) sodium carboxymethyl betaine chloride
having the formula II given previously.

15

Laboratory scale granulation was carried out using a
Moulinette* kitchen mixer ex Moulinex, France.

Storage testing was carried out using open containers at
20 37°C and 70% relative humidity, samples being examined after
9 days or after 14 days.

For storage testing, detergent powder compositions were used
as follows:

25

Detcomp1	a non-bleaching formulation
Detcomp2	a bleaching formulation

- 22 -

	<u>Detcomp1</u>	<u>Detcomp2</u>
Sodium linear alkylbenzene sulphonate	7.9	9.4
Nonionic surfactants	8.0	4.2
Soap/fatty acid	0.8	0.6
Acrylic/maleic copolymer	1.4	1.2
Sodium carboxymethylcellulose 68%	0.4	0.3
Sodium tripolyphosphate	30.0	23.9
Sodium disilicate	7.9	6.3
Sodium sulphate	14.5	9.3
Sodium carbonate	8.9	8.5
Sodium bicarbonate	4.0	-
Enzymes (protease/lipase/amylase)	0.7	0.7
Sodium perborate tetrahydrate	-	20.0
TAED granules	-	2.2
EDTMP (Dequest* 2047)	-	0.6
Antifoam granule	1.2	1.5
Soil release polymer granule	1.2	1.2
Fluorescer granule	-	0.6
Perfume, minor ingredients, water	to 100	to 100

- 23 -

EXAMPLES 1 AND 2, COMPARATIVE EXAMPLES A to CComparison of various silicas and other carrier materials

5

The granular polymer compositions shown below were prepared using the Moulinette mixer.

Example	1	2	A	B	C
DTI polymer	24.8	23.4	22.6	54.4	52.4
Carrier material:					
Gasil AB720	74.9				
Gasil 200TP		66.4			
Alusil ET			53.2		
Sipernat 50				38.6	
Sorbosil TC15					44.5
Water	0.3	10.2	24.2	7.0	3.1

10

The granules were incorporated at 2.5 wt% into detergent powder compositions Detcompl (non-bleaching) and Detcomp2 (bleaching) and 20g samples of each powder were stored for 15 9 days as described above. The samples were then inspected visually for the development of discoloured granules as speckles, the results being shown below.

- 24 -

	<u>Detcomp1</u>	<u>Detcomp 2</u>
1	No change	No change
2	Slight brownish/black speckles	No change
A	Brownish/black speckles	Brownish/black speckles
B	Brownish/black speckles	Brownish/black speckles
C	Brownish/black speckles	Brownish/black speckles

5

EXAMPLES 3 to 6Granules containing phthalic acid

- 10 Granules having the compositions shown below were prepared as described in Examples 1 and 2, the DTI polymer solution, the silica and the phthalic acid being mixed together in the Moulinette mixer.
- 15 9-day storage tests were carried out as described previously and the results are shown below.

- 25 -

Granule compositions

Example	3	4	5	6
DTI polymer	8.3	15.1	20.7	30.8
Carrier material: Gasil AB720 Gasil 200TP Alusil ET Sorbosil TC15	45.5	39.0	30.0	27.1
Phthalic acid	45.4	39.0	30.0	27.1
Water	0.7	6.9	19.3	15.0

Storage results

5

	<u>Detcomp1</u>	<u>Detcomp2</u>
3	No change	No change
4	Some brownish/black speckles	No change
5	Some brownish/black speckles	No change
6	Some brownish/black speckles	Some yellowish speckles

- 26 -

EXAMPLES 7 to 11Granules containing Gasil 200TP

- 5 Using a different batch of polymer, granules were prepared to the formulations given below (% based on anhydrous material), in the Moulinette mixer.

Example	7	8	9	10	11
DTI polymer	15.0	9.7	10.9	20.0	11.3
Gasil 200TP	85.0	54.2	85.4	80.0	79.2
Adipic acid		36.1			
Polyacrylic acid			3.7		9.5

10

In Examples 9 and 11 the polyacrylic acid was added separately, subsequently to the main granulation.

15

In Examples 10 and 11, granulation took place over three stages with some intermediate oven drying of the sample, allowing a higher polymer level to be achieved.

- 20 14-day storage tests were carried out using 5% of each granule in Detcomp1. Two different visual assessments were made: the approximate percentage of the granules that were coloured, and (via the optical microscope) the colour of any discoloured granules.

25

- 27 -

	Percentage of discoloured granules	Colour of discoloured granules
7	None	-
8	None	-
9	None	-
10	Very few	Beige
11	Very few	Beige

These granules were subjected to a further test to simulate to what extent detergent powders containing these granules would discolour in the dispenser drawer of a drum-type front-loading washing machine.

Granules were mixed, using a rollerbed, into 20 g samples of Detcompl in amounts corresponding to 0.2 wt% of the DTI polymer in the final formulation. Each 20 g sample was split into 2 10 g samples in plastic weighing boats, 5 ml of tap water (West Wirral water) was added to form a slurry, the samples were left to stand and any colour developing was recorded.

After drying over 2 days the samples were split into sets and presented to a group of panellists who were asked to rank each set against a control containing Detcompl and Gasil 200TP only, taking into account number and colour of speckles and overall powder colour. The results, averaged over all panellists, were as follows, the highest preference being indicated by the lowest number (1).

- 28 -

Example	% DTI polymer content	Ingredients of granule	Average panellist ranking
Control	0	Gasil	1
7	15.0	Gasil/polymer	2.8
9	10.9	Gasil/polyacrylic acid/polymer	3.4
10	20.0	Gasil/polymer	3.8
11	11.3	Gasil/polyacrylic acid/polymer	4
8	9.7	Gasil/adipic acid/polymer	6

These results indicated a preference for Gasil-alone or
Gasil/polyacrylic acid carriers over Gasil/adipic acid
5 carriers.

EXAMPLES 12 to 14

10 More granules containing the acidic silica, Gasil 200TP,
were prepared using a different, particularly dark, batch of
polymer. These examples show how the use of an acid in
addition to an acidic silica can improve granule colour when
the polymer is very discoloured.

15

Example	12	13	14
DTI polymer	18.6	11.6	11.4
Gasil 200TP	81.4	44.2	44.3
Adipic acid		44.2	
Phthalic acid			44.3

- 29 -

14-day storage results were as follows:

	Percentage of coloured granules	Colour of coloured granules
12	About 100%	Brown/beige/yellow
13	About 50%	Beige/yellow
14	About 50%	Beige/yellow

- 5 These granules were subjected to the simulated dispenser drawer panel test described previously.

Example	% DTI polymer content	Ingredients of granule	Average panellist ranking
Control	0	Gasil	1
12	18.6	Gasil/polymer	2
13	11.6	Gasil/adipic acid/polymer	3
14	11.4	Gasil/phthalic acid/polymer	4

10 TRANSITION METAL CONTENT

The contents (ppm) of acid-soluble transition metals of the granules of Examples 7 and 12 (both containing Gasil 200TP as carrier) were as follows:

15

Example	Polymer content	Ti	Cr	Mn	Fe
7	15.0	49	0.4	0.2	34
12	18.6	45	0.7	0.2	31

- 30 -

EXAMPLES 15 to 21

Using a different batch of polymer, granules were prepared and panel tested. In Examples 20 and 21, a less acidic but
 5 highly absorbent silica was used to allow exceptionally high polymer loadings.

Example	15	16	17	18	19	20	21
DTI polymer	20.8	20.9	16.6	24.8	19.5	45.4	37.2
Gasil 200TP	79.2	52.7	79.9	75.2	76.6		
Sorbosil						52.3	53.7
Adipic acid		26.4					
Polyacrylic acid			3.5		3.9	2.4	9.1

Example	% DTI polymer content	Ingredients of granule	Average panellist ranking
Control	0	Gasil	
17	16.6	Gasil/polyacrylic acid/polymer	1.8
15	20.8	Gasil/polymer	2
19	19.5	Gasil/polyacrylic acid/polymer	2.8
18	24.8	Gasil/polymer	3.4
20	45.4	Sorbosil/ polyacrylic acid/polymer	5.6
16	20.9	Gasil/adipic acid/polymer	5.8
21	37.2	Sorbosil/ polyacrylic acid/polymer	6.6

- 31 -

EXAMPLES 22 to 27

Using yet another batch of polymer, further granules containing Gasil 200TP were prepared to the following formulations and gave the panel test results shown. The granule of Example 23 contained titanium dioxide incorporated during granulation.

Example	22	23	24	25	26	27
DTI polymer	21.0	21.0	19.2	16.0	17.4	14.5
Gasil 200TP	79.0	77.0	64.6	56.0	77.5	76.0
Titanium dioxide		2.0				
Polyacrylic acid					5.1	9.5
Phthalic acid			16.2	28.0		

10

Example	% DTI polymer content	Ingredients of granule	Average panellist ranking
Control	0	Gasil	1
22	21.0	Gasil/polymer	2.8
26	17.4	Gasil/polyacrylic acid/polymer	3.2
23	21.0	Gasil/TiO ₂ /polymer	3.4
27	14.5	Gasil/polyacrylic acid/polymer	5
24	19.2	Gasil/phthalic acid/polymer	5.8
25	16.0	Gasil/phthalic acid/polymer	6.8

- 32 -

EXAMPLES 28 to 32:Granules with titanium dioxide coating

Using the same batch of polymer as in Examples 22 to 27,
5 granules were prepared to the following formulation
(Example 28):

DTI polymer	18.6
Gasil 200TP	77.4
10 Polyacrylic acid	4.0

Further granules were prepared from the granules of Example
28 by coating with titanium dioxide in amounts of 1, 2, 3 or
5 parts per 100 parts of the Example 28 granule. The
15 granules were subjected to the panel test described
previously and the rankings were as follows:

Example	Parts of TiO ₂ per 100 parts of Example 28 granule	Average panellist ranking
Control	-	1
29	1	2
30	2	3
28	0	4.4
32	5	5
31	3	5.2

20 These results indicate a preference for lower levels of
titanium dioxide coating.

EXAMPLES 33 TO 35

Granules were prepared on a pilot plant scale to the following formulations:

5

Example	33	34	35
DTI polymer	20.0	14.7	20.0
Gasil 200TP	75.6	74.3	75.6
Polyacrylic acid	4.4	11.0	4.4

The granules were prepared using a Fukae (Trade Mark) FS30 batch high-speed mixer/granulator and an APEX fluidised bed.

10

The silica was charged into the mixer/granulator and the DTI polymer, as a 40% aqueous solution, was added while operating the stirrer at 100 rpm and the chopper at 3000 rpm. The polymer and silica were mixed for 4 minutes at a stirrer speed of 250 rpm and a chopper speed of 3000 rpm. Polyacrylic acid, as a 48% aqueous solution, was then added while operating the stirrer at 100 rpm and the chopper at 3000 rpm. The mixture was granulated for 2 minutes at a stirrer speed of 250 rpm and a chopper speed of 3000 rpm. The resulting granules were then dried on the fluidised bed and sieved to a particle size range of 250-850 micrometres.

15

20

The granules were of good colour and showed good colour stability when incorporated in a concentrated zeolite-built non-bleaching detergent powder formulation.

25

- 34 -

The dye transfer inhibiting properties of the polymer granules of Examples 33 to 35 were tested against a control in which the polymer was incorporated into a wash liquor in liquid form. The test involved monitoring the transfer of
 5 Direct Red 80 dye (10 micromolar concentration) in wash liquors containing the following ingredients:

10 Linear alkylbenzene sulphonate
 Nonionic surfactant (C₁₂-C₁₅ 7EO)
 Sodium tripolyphosphate
 Sodium carbonate

at ratios of anionic surfactant to nonionic surfactant of 100:0, 90:10, 80:20, 60:40 and 0:100.

15

The polymers and granules were dosed in amounts calculated to give equal final polymer concentrations in the wash liquor of 0.00436 g/100 ml.

20 The results are shown in the following table. There was a small but not significant loss of dye transfer inhibiting activity.

Example	polymer in granule (wt%)	$\Delta\Delta E$ values of white monitors compared with control, at anionic:nonionic ratio of				
		100:0	90:10	80:20	60:40	0:100
33	20.0	+0.36	+1.98	+2.07	+3.29	+3.64
34	14.7	-0.36	+1.71	+2.84	+4.32	+5.65
35	20.0	+0.61	+2.41	+2.01	+4.42	+4.05

- 35 -

COMPARATIVE EXAMPLES D and E

Granules were prepared using the aluminosilicate Alusil ET as carrier. The formulations were as follows:

5

Comparative Example	D	E
DTI polymer	29.3	14.2
Alusil ET	68.0	67.2
Titanium dioxide	1.7	
Polyacrylic acid		18.6


10 The granules of Comparative Example D turned green immediately on drying. The granules of Comparative Example E gradually turned green on drying.

- 36 -

CLAIMS

1 A free-flowing granular polymer composition suitable
for incorporation in a particulate detergent composition,
5 the granular polymer composition comprising a dye-transfer-
inhibiting polymer and a carrier material, characterised in
that:

(a) the dye-transfer-inhibiting polymer has
10 the general formula I:

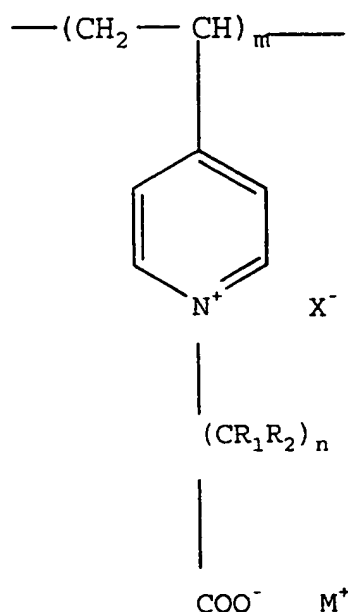

wherein m indicates the degree of polymerisation, X is an
15 anion, R_1 and R_2 are independently hydrogen, alkyl or aryl,
 n is an integer within the range of from 1 to 5, and M is a
cation;


(b) the carrier material comprises a silica.

20

- 37 -

2 A granular polymer composition as claimed in claim 1, characterised in that the dye-transfer-inhibiting polymer (a) is poly(4-vinylpyridine) sodium carboxymethyl betaine chloride, having the formula II:

5

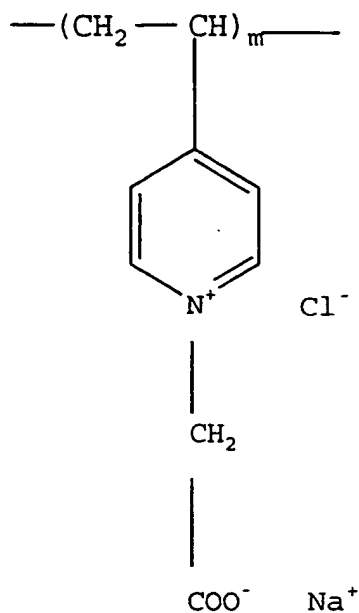

10

3 A granular polymer composition as claimed in claim 1 or claim 2, characterised in that the carrier material comprises a silica which is acidic.

15

4 A granular polymer composition as claimed in claim 3, characterised in that the silica has a 5% solution pH within the range of from 2.0 to 6.0, preferably from 3.0 to 5.0.

20

- 38 -

5 A granular polymer composition as claimed in any preceding claim, characterised in that the silica has an iron content of less than 200 ppm, preferably less than 150 ppm.

5

6 A granular polymer composition as claimed in claim 5, characterised in that the silica has an iron content within the range of from 50 to 200 ppm, preferably from 50 to
10 150 ppm.

7 A granular polymer composition as claimed in any preceding claim, characterised in that the carrier material
15 comprises a silica in conjunction with a solid organic or inorganic acid.

8 A granular polymer composition as claimed in claim 7,
20 characterised in that the solid acid is present as a coating or partial coating on the granule.

9 A granular polymer composition as claimed in claim 7 or
25 claim 8, characterised in that the solid acid is an aliphatic or aromatic dicarboxylic acid, preferably adipic acid or phthalic acid.

30 10 A granular polymer composition as claimed in claim 7 or claim 8, characterised in that the solid organic acid is a polymeric polycarboxylic acid, preferably polyacrylic acid.

- 39 -

11 A granular polymer composition as claimed in any preceding claim, characterised in that it comprises:

(a) from 5 to 50% by weight, preferably from 10 to 30% by weight, of the dye-transfer-inhibiting polymer,

(b) from 20 to 95% by weight, preferably from 30 to 90% by weight, of silica, and either

(c1) from 0 to 60% by weight, preferably from 20 to 50% by weight, of a monomeric solid organic acid, or

(c2) from 0 to 15% by weight, preferably from 2 to 10% by weight, of a polymeric solid organic acid.

15

12 A process for the preparation of a granular polymer composition as claimed in claim 1, characterised in that it comprises mixing and granulating the dye-transfer-inhibiting polymer in aqueous solution form, the silica, and optionally a solid organic or inorganic acid, in a high-shear mixer/granulator.

13 A process as claimed in claim 12, characterised in that it comprises the steps of:

(i) mixing and granulating the dye-transfer-inhibiting polymer solution with silica to form granules;

30

(ii) mixing the solid organic acid with the granules formed in step (i) whereby the granules are coated or partially coated with the solid organic acid.

- 40 -

14 A particulate laundry detergent composition which
comprises:

(a) from 5 to 60 wt% of one or more organic detergent
5 surfactants,

(b) optionally from 0 to 80 wt% of detergency builder,

(c) optionally other detergent ingredients,
10

characterised in that it further comprises

(d) a granular polymer composition as claimed in any one of
claims 1 to 11, in an amount equivalent to a content of the
.15 polymer itself of from 0.01 to 10 wt%, preferably from 0.02
to 5 wt%, more preferably from 0.03 to 2 wt%.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04735

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C11D3/00 C11D3/37 C11D3/12 C11D11/00 C11D17/00
C11D3/20 C11D17/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C11D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 776 879 A (HORNBY JOHN C ET AL) 7 July 1998 (1998-07-07) column 2, line 17 - line 30; claims 1-17 ---	1,2,11, 12
Y	EP 0 677 580 A (PROCTER & GAMBLE) 18 October 1995 (1995-10-18) cited in the application page 2, line 27 - line 30; claims 1,2; example 1 ---	1,2,11, 12
A	WO 98 28397 A (WELCH ROBERT GARY ;CUTTER GARY RAY (US); ANGELL ADRIAN JOHN WAYNFO) 2 July 1998 (1998-07-02) page 6, line 15 - line 33; claims 1-10; example 1 --- -/--	1-12



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 October 1999

Date of mailing of the international search report

28/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Loiselet-Taisne, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04735

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 259 994 A (WELCH ROBERT G ET AL) 9 November 1993 (1993-11-09) claims; examples -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/04735

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5776879	A	07-07-1998	AU 9379498 A	12-04-1999
			US 5929175 A	27-07-1999
			WO 9915614 A	01-04-1999
			US 5869442 A	09-02-1999
			US 5863880 A	26-01-1999
<hr/>				
EP 0677580	A	18-10-1995	CA 2187439 A	26-10-1995
			CN 1149885 A	14-05-1997
			JP 9512051 T	02-12-1997
			WO 9528462 A	26-10-1995
			US 5849684 A	15-12-1998
<hr/>				
WO 9828397	A	02-07-1998	EP 0946706 A	06-10-1999
<hr/>				
US 5259994	A	09-11-1993	AU 4686293 A	03-03-1994
			CA 2141822 A,C	17-02-1994
			CN 1101070 A,B	05-04-1995
			DE 69315075 D	11-12-1997
			DE 69315075 T	14-05-1998
			EP 0652937 A	17-05-1995
			JP 7509525 T	19-10-1995
			MX 9304702 A	31-01-1995
			WO 9403567 A	17-02-1994
<hr/>				

